


FIRST ESTABLISH IF BRACELET IS 1, 2 OR 3 BELOW

1. SLIDING CLASP

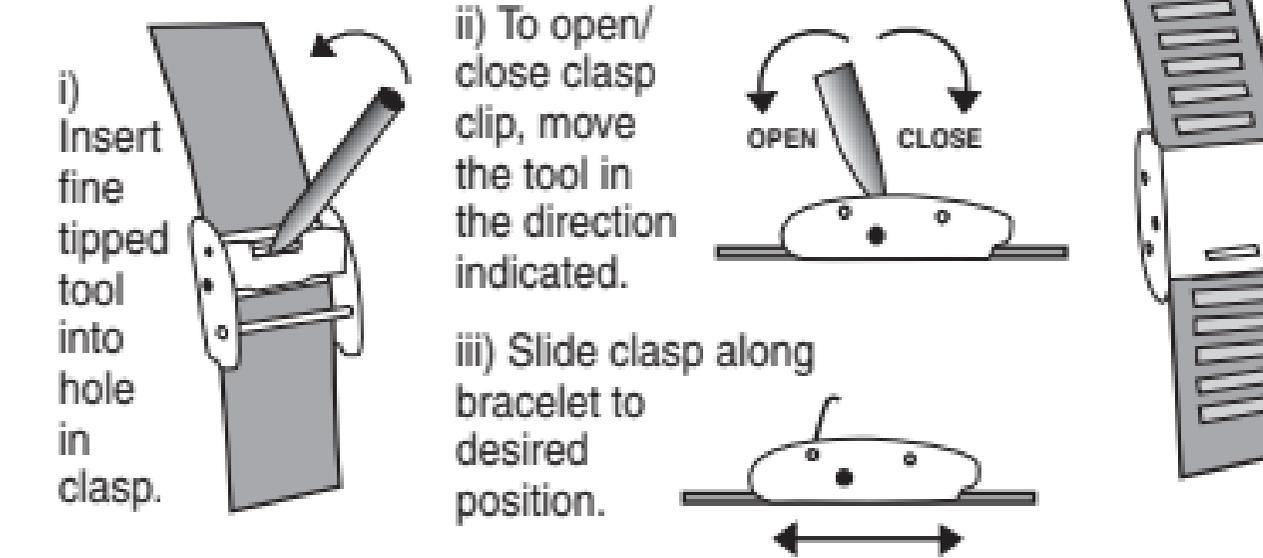


iv) When in selected position, locate tabs on back of clasp into slots on bracelet and snap down/close the clip [see procedure (ii)].

IMPORTANT
To avoid straining the clip do not use excessive pressure. If resistance is found when closing clip, the tabs are not located properly and should be re-located.

AND THEN PROCEED AS INDICATED

2. ADJUSTABLE CLASP

To set the bracelet to the required length, depress the end pin of the spring bar as indicated below using a pointed instrument (e.g. a pin) and relocate the spring bar in any one of the holes.

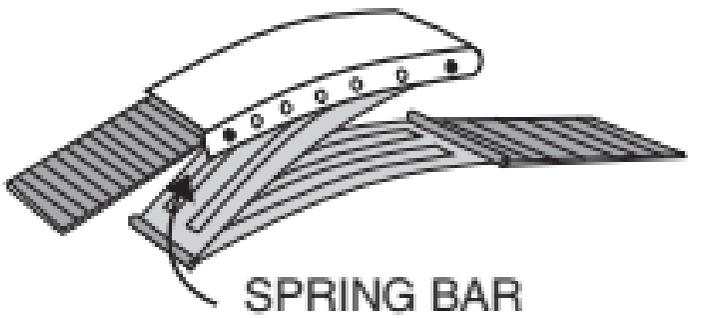

IF THE LENGTH REQUIRES FURTHER ADJUSTMENT FOLLOW INSTRUCTION 3.

3. LINK ADJUSTMENT

Should you feel that your bracelet is too long or too short, the following procedure should be adopted.

- i) Complete your name and address and send with your watch direct by registered post to Service Department, T.P. (UK) Ltd, Alexander House, Chartwell Drive, Wigston, Leicester LE18 2EZ where it will receive immediate attention. Do not send the presentation box as this will not be returned.
- ii) Alternatively, if purchased from a High Street Jewellers shop, return this gauge with your watch to that retailer.

Customer's name:

Address:

.....

..... Postcode:.....


Daytime Phone No:.....

GS01/09.10

SEKONDA

BRACELET
GAUGE

GS01

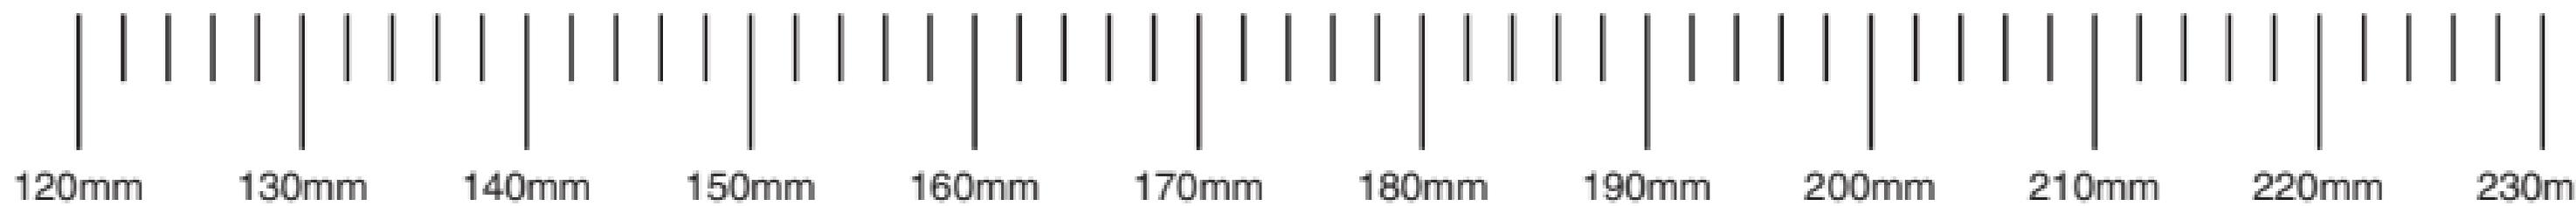

1. *Ú; ã c@ Á æ * ^ Á @ } Á | æ ^ Á [~ } á Á ! ã d È*
DO NOT ATTEMPT ADJUSTING BRACELET YOURSELF.
2. Adjust to comfortable length on wrist.
3. Mark tape at required length.